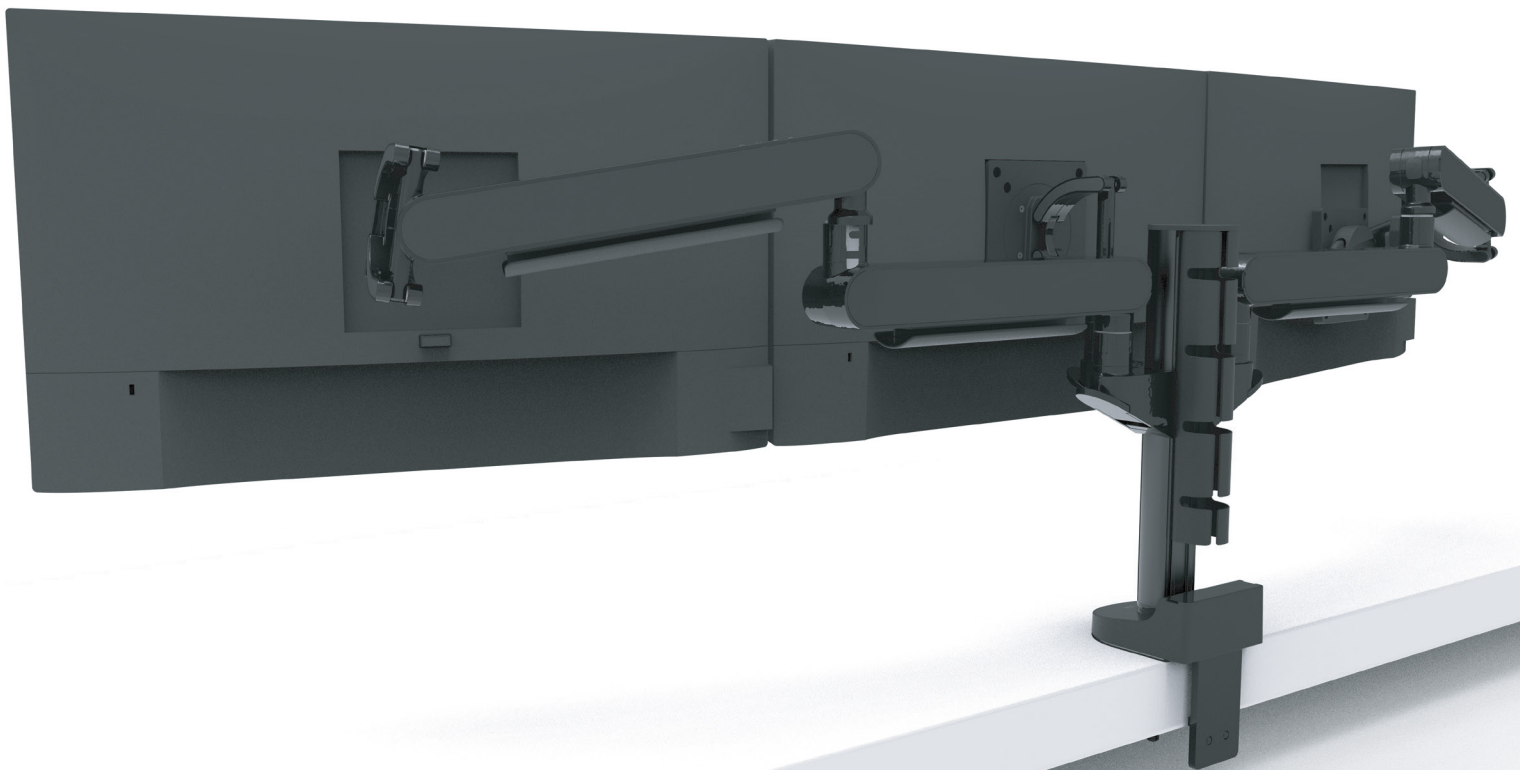
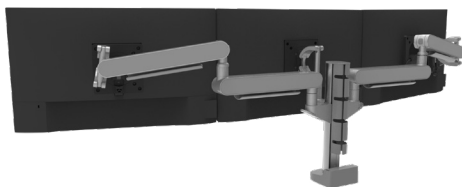


# ZP3

---

zCentric™





# ZP3

## Triple Monitor Arm Post System

[View Online](#)
[Contact Sales](#)



Patented Dial-Stop



Post System for Scalability and Modularity



Integrated Cable Management



Patented Infinite Panel Design

### Specifications

|                                        |                                                                            |
|----------------------------------------|----------------------------------------------------------------------------|
| Maximum arm weight load:               | 24.3 lbs.                                                                  |
| Maximum post weight load:              | 90 lbs (Supports up to 6 monitors)                                         |
| Arm configuration:                     | 3 monitors, 2 sliders                                                      |
| Monitor height adjustment range:       | Total: 11.7", 5.9" above and 5.8" below mounting point                     |
| Monitor depth adjustment range:        | 24.9", fully extended to 3.4" front of the post                            |
| Arm length:                            | Straight: 13.9"<br>Straight / straight: 24.3"<br>Straight / dynamic: 24.9" |
| Post diameter:                         | 1.7"                                                                       |
| Monitor mount (shoulder) length:       | Center point of post to center point of arm insert: 2.8"                   |
| Post heights:                          | 12" for single row, 24" for dual row                                       |
| Mounts available:                      | 2 piece clamp mount, top-down slide clamp mount, bolt-through clamp mount  |
| Arm support brackets (post shoulders): | Tool-free height adjustment along the entire length of the post            |
| Cable management:                      | Concealed within arms and post                                             |
| Slider adjustment:                     | 9" of lateral adjustment per slider                                        |
| Installation tools placement:          | Hidden in the top of post, suspended from top cap                          |
| VESA compliance:                       | 75 x 75 mm and 100 x 100 mm                                                |
| Dual rotation dial-stop:               | 180° and 360° (no stop) at both center and rear joints for enhanced safety |
| Sustainability:                        | 29% recycled and 99% recyclable content                                    |
| Warranty:                              | 10 year                                                                    |

